PROJOY electric
— Switch To Safety! —

Surge Protector

PESP/PER Series (Advanced)

Flame retardant material

High reliability

Diverse

-40℃~+70℃



CE CB

Select Code

DC SPD

PESP	–	a		b	c
Projoy DC SPD		Max. Continuous Operating Voltage		Usage Category	Pole
		DC 600V DC 1000V DC 1500V		T2 T1+T2	2P 3P

* The frame part is for selection only, not for product labeling

PROJOY electric
— Switch To Safety! —

AC SPD

PER	–	x	–	a		b	c
Projoy AC SPD		Nominal Discharge Current		Max. Continuous Operating Voltage		Usage Category	Pole
		C20: 20kA C30: 30kA C40: 40kA		AC 275V AC 385V AC 440V		T2 T1+T2	1P 2P 3P 4P

* The frame part is for selection only, not for product labeling


Attachment device

Failure and disengagement device

The surge protector is provided with a fail-safe device. When the protector breaks down due to overheating, the fail-safe detach device can automatically detach from the power grid and give an indication signal.When the protector is normal, the display window will show green, and after failure, the display window will show red.

Alarm remote signaling device

The protector can be made into a variety with remote signaling contacts. The remote signaling contacts have a set of normally open and normally closed contacts. When the protector is working normally, normally closed contacts are connected. If one or more modules of the protector fail, the contact will change from normally open to normally closed. Normally open contacts will work and send trouble information.

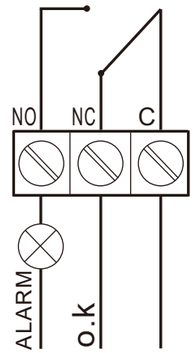

PROJOY electric
— Switch To Safety! —

ProJoy Electric Co., Ltd.
2nd Floor, Building 3, No. 2266, Taiyang Road, Xiangcheng District, Suzhou, China
Tel: +86 512 6878 6489 | Fax: +86 512 6878 6489
Email: sales@projoy-electric.com | www.projoy-electric.com

PROJOY electric

– Switch To Safety! –

Technical data

DC SPD	IEC 61643-31、EN 61643-31					
Usage Category	T1+T2			T2		
Pole	2P	3P	3P	2P	3P	3P
Nominal Discharge Current In	20kA			20kA		
Max. Discharge Current Imax	40kA			40kA		
Max. Impulse current Iimp	5kA			/		
Max. Continuous Operating Voltage Ucpv	600VDC	1000VDC	1500VDC	600VDC	1000VDC	1500VDC
Protection level Up	3.0kV	3.5kV	5.5KV	3.0kV	3.5kV	5.5KV
Operating Temperature	-40°C～70°C					
Respones Time	⩽25ns					
Wiring capacity	Hard wire⩽35mm², Flexible wire 2.5~25mm²; Ultimate torque 3.5Nm					
Working instruction window	Green indicates: normal; Red indicates: damage and needs to be replaced immediately					
Alarm indication output	Optional function; Terminal 11 is the common Terminal, 14 is normally open, and 12 is normally closed; working voltage⩽125V, switching current⩽1A; wiring capacity: 0.5~1.5mm²					
Protection Rating	IP20					
Mounting	Symmetrical rail 35 mm					
Certification	TUV、CE、CB					


Notes:
1. Class T1 SPD is mainly used in the main incoming pannel of the power distribution system;
   T2 type SPD is mainly used in distribution box of power distribution system;
2. T1 has an Iimp value, T2 has an In value, and T1+T2 has both Iimp and In values.

AC SPD	IEC 61643-11、EN 61643-11						
Wave Shape	T1: 10/350μs T2: 8/20μs						
Model	PER-C20		PER-C30		PER-C40		PER-C20 (compact)
Usage Category	T1+T2	T2	T1+T2	T2	T1+T2	T2	T2
Pole	1P/ 2P/ 3P/ 4P						1+NPE/3+NPE
Nominal Discharge Current In	20kA	20kA	30kA	30kA	40kA	40kA	20kA
Max. Discharge Current Imax	40kA	40kA	60kA	60kA	80kA	80kA	40kA
Max. Impulse current Iimp	5kA	/	5kA	/	5kA	/	/
Max. Continuous Operating Voltage Uc	275V/385V/440V		275V/385V/440V		275V/385V/440V		275V/385V
Protection level Up	1.5kV/1.8kV/2.2kV		2.0kV/2.2kV/2.5kV		2.5kV/3.0kV/3.5kV		1.5kV/1.8kV
Operating Temperature	-40°C～70°C						
Respones Time	⩽25ns						
Wiring capacity	Hard wire⩽35mm², Flexible wire 2.5~25mm²; Ultimate torque 3.5Nm						
Working instruction window	Green indicates: normal; Red indicates: damage and needs to be replaced immediately						
Alarm indication output	Optional function; Terminal 11 is the common Terminal, 14 is normally open, and 12 is normally closed; working voltage⩽125V, switching current⩽1A; wiring capacity: 0.5~1.5mm²						
Protection Rating	IP20						
Mounting	Symmetrical rail 35 mm						
Certification	TUV、CE、CB						

Notes:
1. Class T1 SPD is mainly used in the main incoming pannel of the power distribution system;
   T2 type SPD is mainly used in distribution box of power distribution system;
2. T1 has an Iimp value, T2 has an In value, and T1+T2 has both Iimp and In values;
3. 1+NPE and 3+NPE are recommended for the charging pile industry.

Dimensions

DC SPD

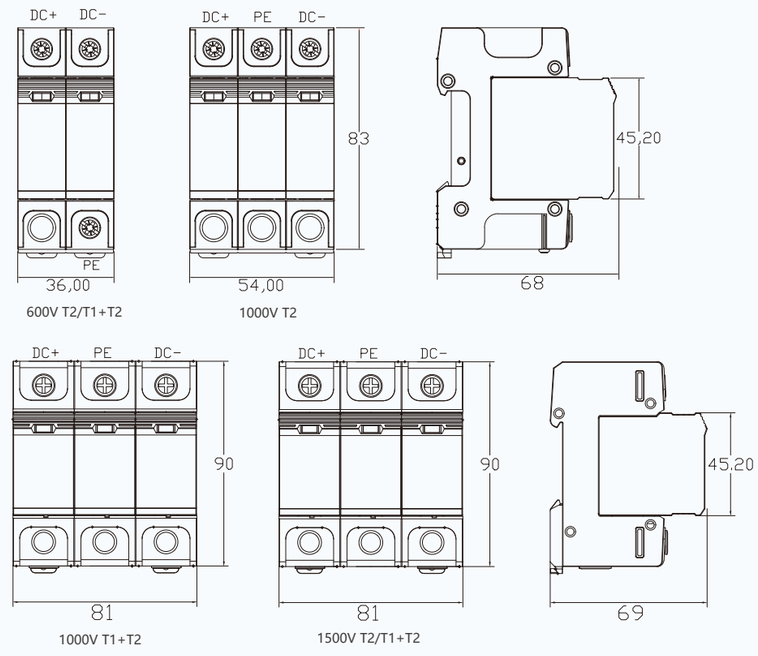

AC SPD

