

Xcellent Plus

Wall-Mounted LV Battery System

Dependable Safety: Designed with a high level of safety features, including dependable lithium iron phosphate (LiFePO₄) technology, ensuring safe and stable operation.

Sleek Aesthetics: Modern and sleek design that integrates seamlessly into residential environments, enhancing the aesthetic appeal of installation areas.


Whisper-Quiet Operation: Engineered for silent operation, making it ideal for home settings where noise levels need to be minimal.

Versatile Compatibility: Compatible with various inverters and energy systems, allowing for flexible integration with existing home energy setups.


Long Cycle Life: Offers an impressive cycle life of up to 8000 cycles, providing long-term reliability and cost-effectiveness.



Product Details

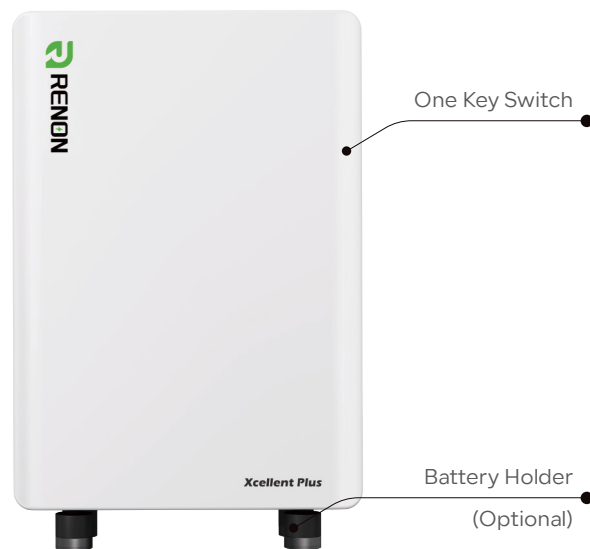

System Layout

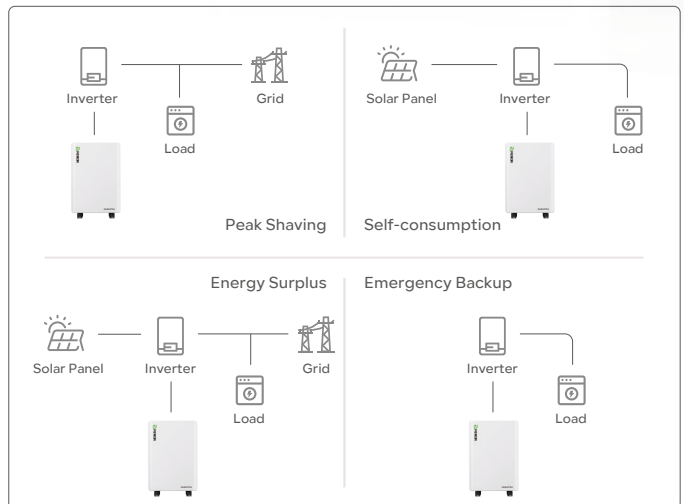

Application Scenario



Battery Energy Storage	
Battery Chemistry	LiFePO4
Cell Capacity (Ah)	314
Nominal Energy (kWh)	16
Output Power (kW)	10.2
Default Voltage (V)	51.2
Voltage Range (V)	43.2 ~ 59.2
Max. Operation Current (A)	200
Primary Overcurrent Protection (A)	210@10S
Secondary Overcurrent Protection (A)	250@500mS
Max. Charging Voltage (V)	58.4
Discharge Cut-off (V)	43.2
Recommended Charging Voltage (V)	56.8
Dimension (W*D*H)	560*200*800mm 22*7.8*31.5in
Net Weight (Approximate)	134.5kg 296.5lb

General Parameters	
Scalability	Max. 15 systems in parallel
Storage Conditions	-20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%
Operating Temperature	Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C
Cooling	Natural Cooling
Max. Altitude	4000m / 13123ft
Cycle Life	8000 Cycles
Communication	RS485, CAN, RS232

System Characteristic	
Battery Model	R-XC016161
Battery Compliances	IEC 62619, UN 38.3, CEI 0-21, EN-61000
Installation Method	Wall-Mounting or Floor Mounting
Installation Scene	Indoor or Outdoor
IP Rating	IP65
Warranty [1]	10 Years

[1] Please refer to the warranty letter for details

Packaging & Shipping Details

